



Product Model Number

CKO-CS15-075033-4001

✓ Model Number Definitions

CKO-XXXX-XXXXXX-XXXX




- A. Chun Kuang Optics Corp. Product
- B. Product Type: product abbreviation
Ex:
CH→CoB High Intensity
CC→CoB Compact
CS→Soft Shading for CoB LED
HC→Holder for CoB LED

- C. Identity Code
- D. Lens / Fixture Size
Ex: 075026=Φ75mm / Thickness=26mm (round up)
- C. Serial Numbers

The lens datasheet is applicable for **Citizen LED**, that manufactured by Chun Kuang Optics Corp.

✓ Dimensions (mm) : Φ75 x 33

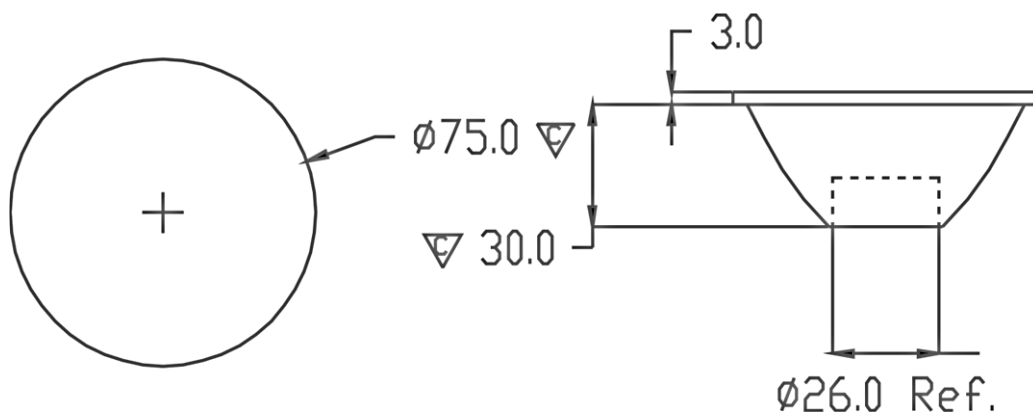


▽:Critical Dimension




Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 711		
LES / LED Size	Φ 8.5 mm		
FWHM (D50)	12°		
Field Angle (D10)	25°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	2791 lm	Measured @ 25.6W	
Material	PC / UL94V2		

cd/klm

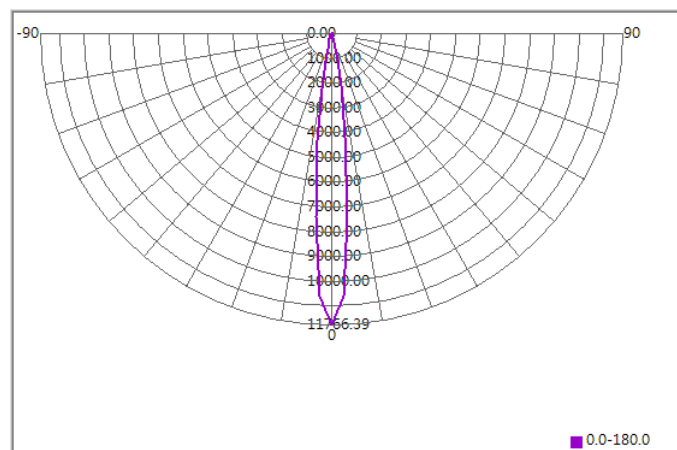

Illuminance At Distances

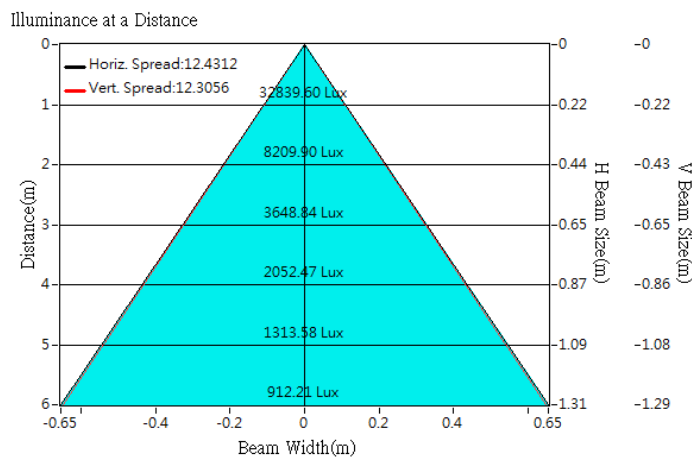





Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 710		
LES / LED Size	Φ 8.5 mm		
FWHM (D50)	12°		
Field Angle (D10)	26°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	2520 lm	Measured @ 26.3W	
Material	PC / UL94V2		

cd/klm

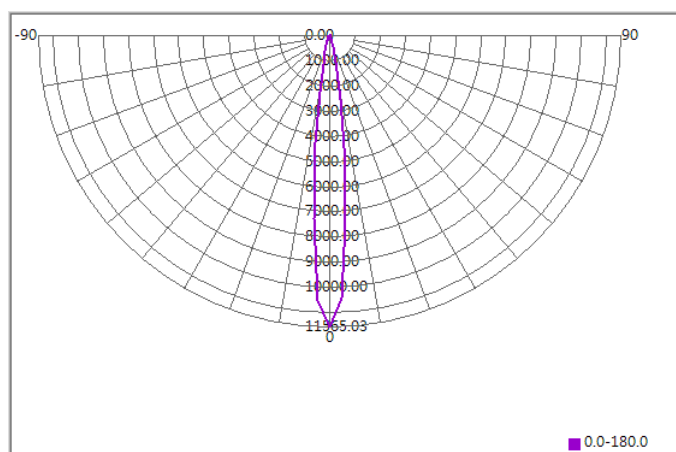

Illuminance At Distances

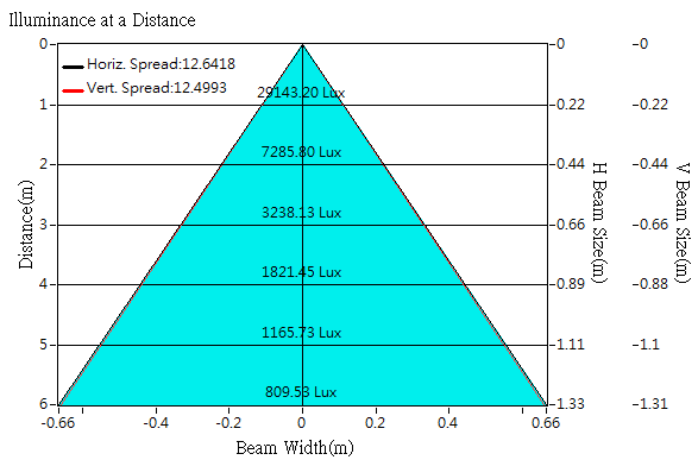





Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 028		
LES / LED Size	Φ 9.8 mm		
FWHM (D50)	13°		
Field Angle (D10)	27°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	1593 lm	Measured @ 12.5W	
Material	PC / UL94V2		

cd/klm

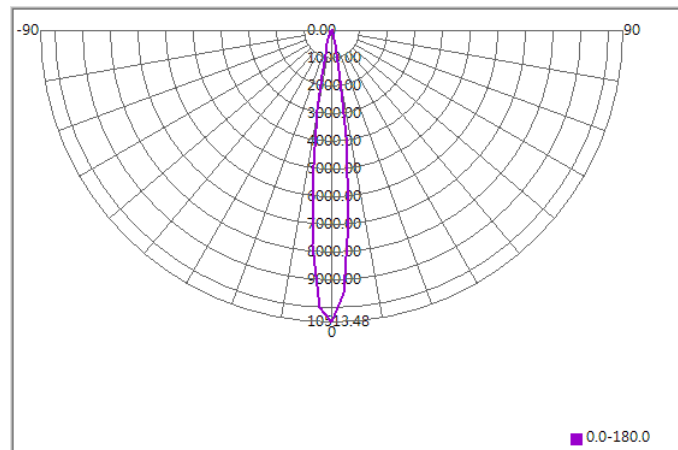

Illuminance At Distances

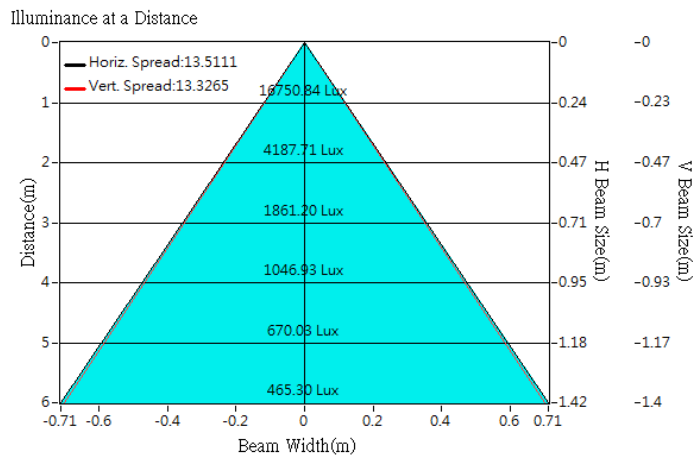





Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 026		
LES / LED Size	Φ 9.8 mm		
FWHM (D50)	13°		
Field Angle (D10)	26°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	1548 lm	Measured @ 12.3 W	
Material	PC / UL94V2		

cd/klm

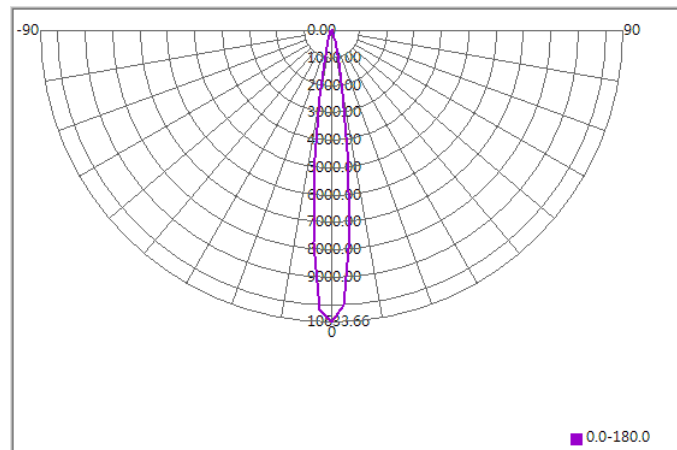

Illuminance At Distances

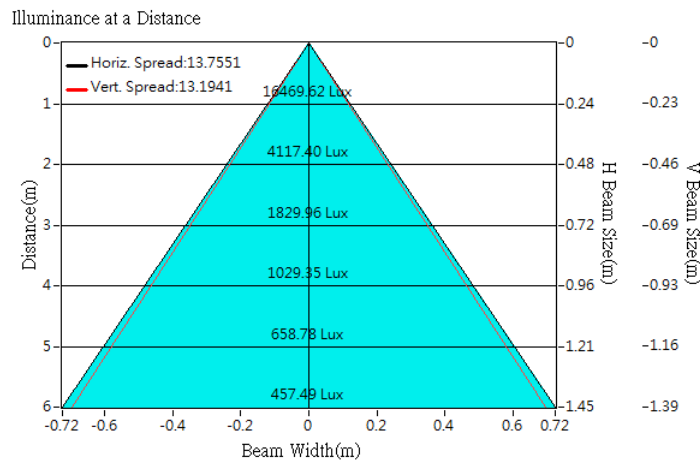





Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 721		
LES / LED Size	Φ 11 mm		
FWHM (D50)	14°		
Field Angle (D10)	29°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	4124 lm	Measured @ 38.8W	
Material	PC / UL94V2		

cd/klm

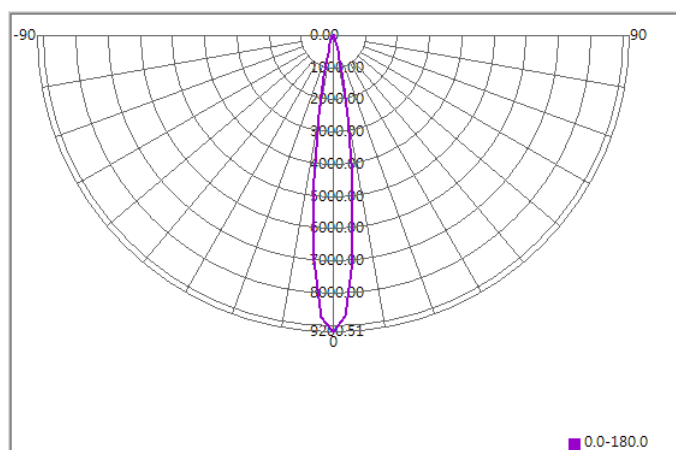

Illuminance At Distances

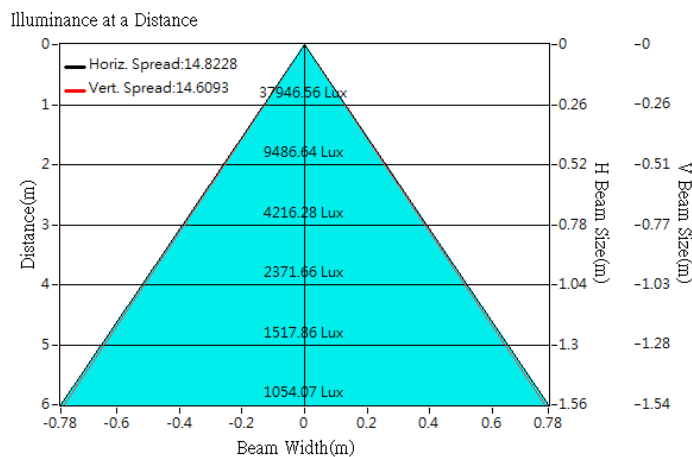





Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 720		
LES / LED Size	Φ 11 mm		
FWHM (D50)	15°		
Field Angle (D10)	30°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	3543 lm	Measured @ 38.7W	
Material	PC / UL94V2		

cd/klm

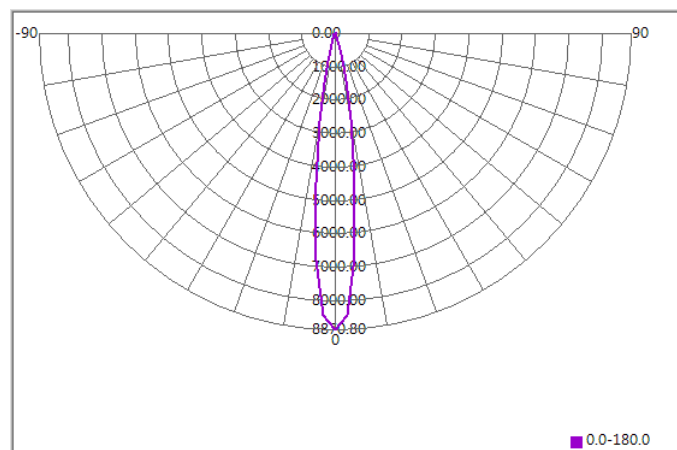

Illuminance At Distances

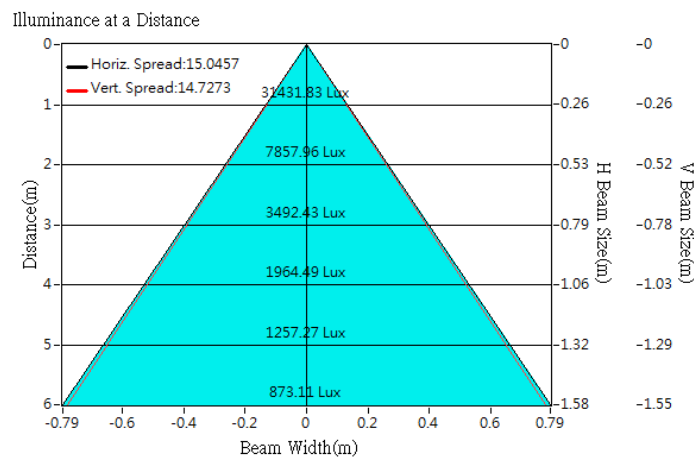





Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 730		
LES / LED Size	Φ 13 mm		
FWHM (D50)	17°		
Field Angle (D10)	34°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	4441 lm	Measured @ 63.7W	
Material	PC / UL94V2		

cd/klm

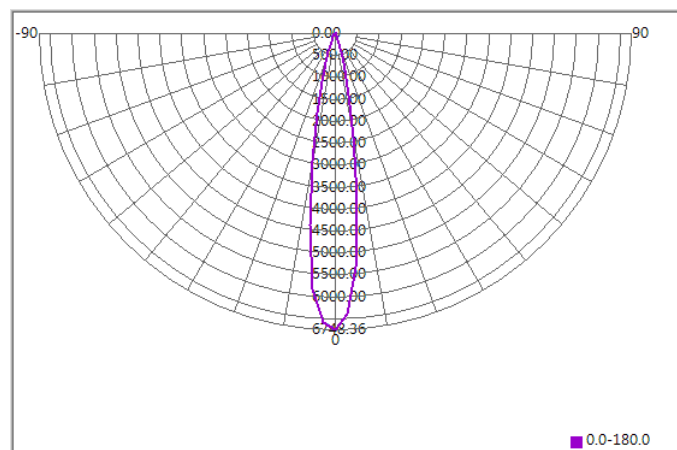


Illuminance At Distances

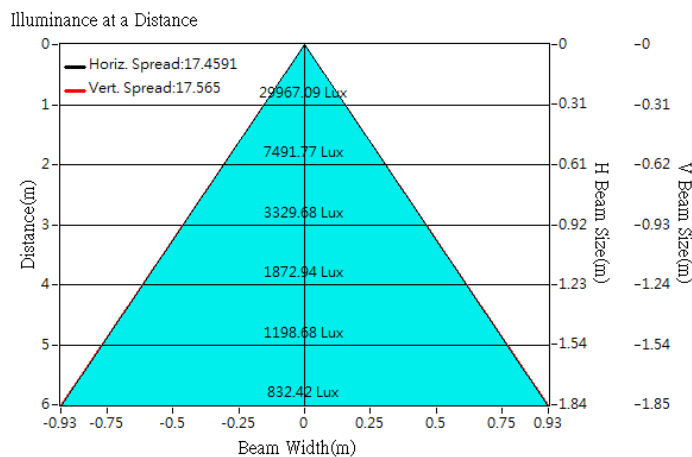





Optical Characteristics

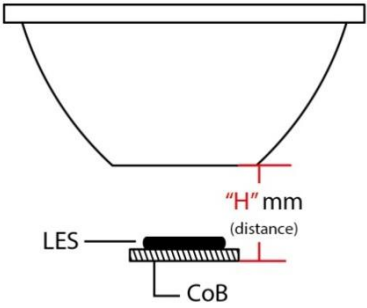Model Number	CKO-CS15-075033-4001		<p>"H" definition</p> 
LED	CLU 038		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	17°		
Field Angle (D10)	35°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	2715 lm	Measured @ 25.4W	
Material	PC / UL94V2		

cd/klm

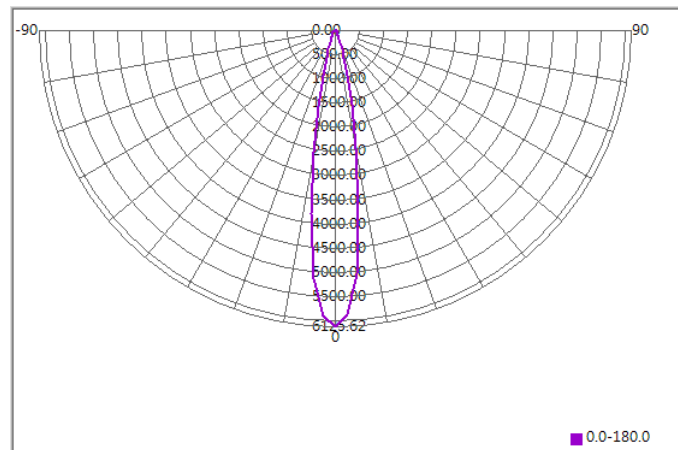

Illuminance At Distances

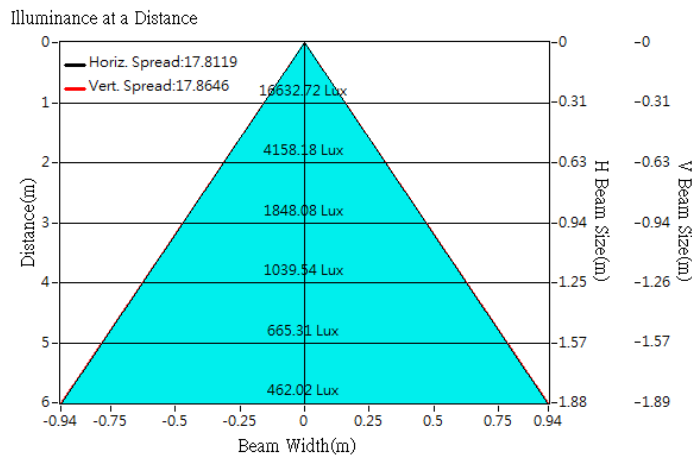





Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 036		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	21°		
Field Angle (D10)	38°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	1993 lm	Measured @ 15.7W	
Material	PC / UL94V2		

cd/klm

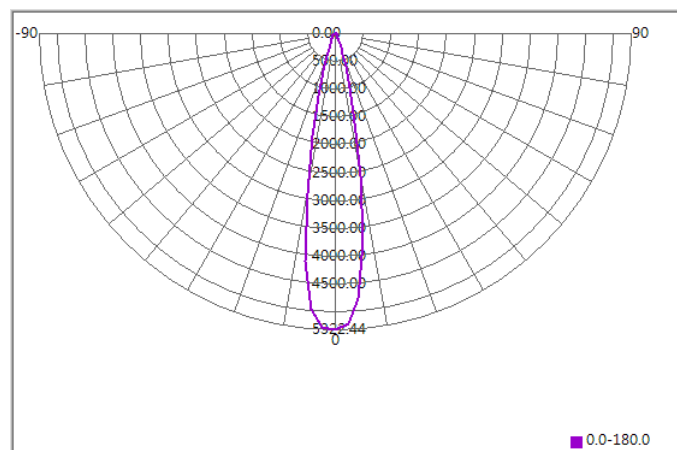

Illuminance At Distances

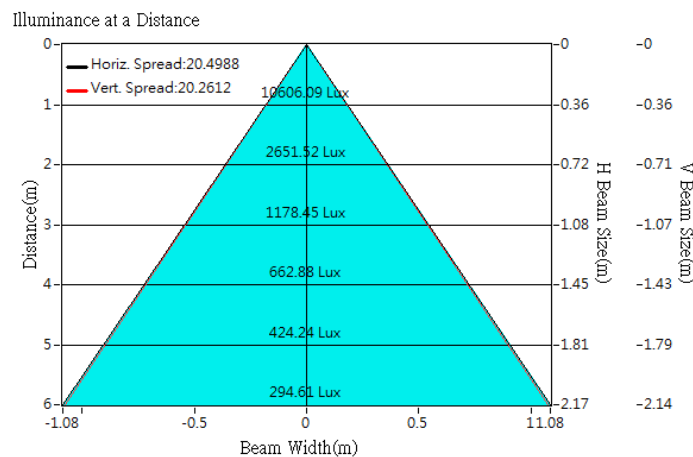




Optical Characteristics

Model Number	CKO-CS15-075033-4001		<p>"H" definition</p>
LED	CLU 048		
LES / LED Size	Φ 22 mm		
FWHM (D50)	29°		
Field Angle (D10)	55°		
H (distance)	3.65 mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	7096 lm	Measured @ 53.8 W	
Material	PC / UL94V2		

cd/klm

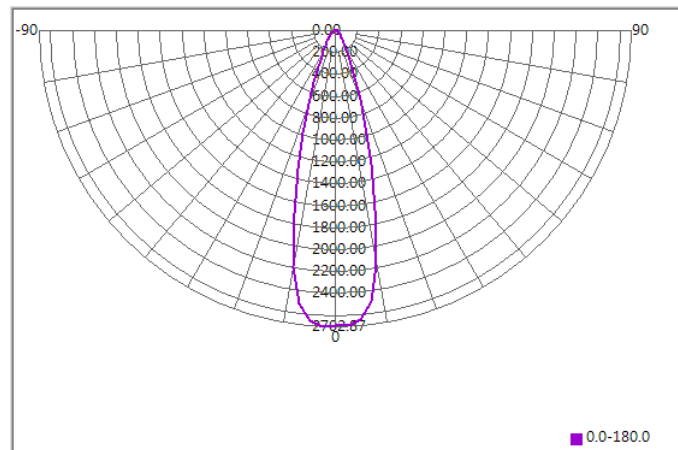

Illuminance At Distances

